查询MMBFJ210供应商

FAIRCHILD
SEMICONDUCTOR®

J210
J211
J212

MMBFJ210
MMBFJ211
MMBFJ212



TO-92



SOT-23
Mark: 62V / 62W / 62X

NOTE: Source & Drain are interchangeable

N-Channel RF Amplifier

This device is designed for HF/VHF mixer/amplifier and applications where Process 50 is not adequate. Sufficient gain and low noise for sensitive receivers. Sourced from Process 90.

Absolute Maximum Ratings*

TA = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{DG}	Drain-Gate Voltage	25	V
V_{GS}	Gate-Source Voltage	- 25	V
I_{GF}	Forward Gate Current	10	mA
T_J , T_{stg}	Operating and Storage Junction Temperature Range	-55 to +150	°C

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:
1) These ratings are based on a maximum junction temperature of 150 degrees C.
2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Thermal Characteristics

TA = 25°C unless otherwise noted

Symbol	Characteristic		Max	Units
		J210-212	*MMBFJ210-212	
P_D	Total Device Dissipation Derate above 25°C	350 2.8	225 1.8	mW mW/°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case	125		°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	357	556	°C/W

*Device mounted on FR-4 PCB 1.6" X 1.6" X 0.06."

©1997 Fairchild Semiconductor Corporation

N-Channel RF Amplifier
(continued)

Electrical Characteristics
TA = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions		Min	Max	Units
OFF CHARACTERISTICS						
$V_{(BR)GSS}$	Gate-Source Breakdown Voltage	I_G = 1.0 µA, V_{DS} = 0		- 25		V
I_{GSS}	Gate Reverse Current	V_{GS} = 15 V, V_{DS} = 0			- 100	pA
$V_{GS(off)}$	Gate-Source Cutoff Voltage	V_{DS} = 15 V, I_D = 1.0 nA	**210**	-1.0	-3.0	V
			211	- 2.5	- 4.5	V
			212	- 4.0	- 6.0	V
ON CHARACTERISTICS						
I_{DSS}	Zero-Gate Voltage Drain Current*	V_{DS} = 15 V, V_{GS} = 0	**210**	2.0	15	mA
			211	7.0	20	mA
			212	15	40	mA
SMALL SIGNAL CHARACTERISTICS						
g_{fs}	Common Source Forward Transconductance	V_{DS} = 15 V, V_{GS} = 0, f = 1.0 kHz				
			210	4000	12,000	µmhos
			211	6000	12,000	µmhos
			212	7000	12,000	µmhos
g_{oss}	Common Source Output Conductance	V_{DS} = 15 V, V_{GS} = 0, f = 1.0 kHz			200	µmhos

*Pulse Test: Pulse Width ≤ 300 µS

Typical Characteristics

Parameter Interactions

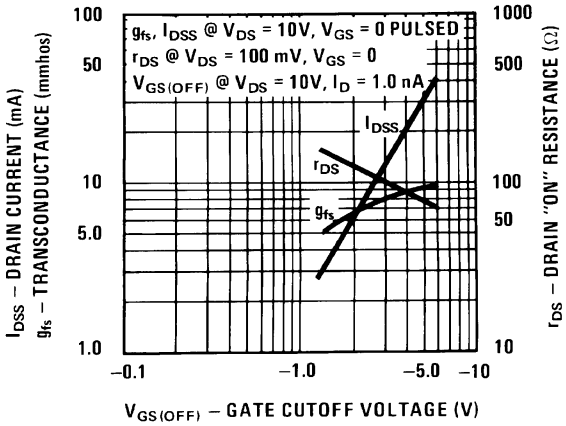

Common Drain-Source

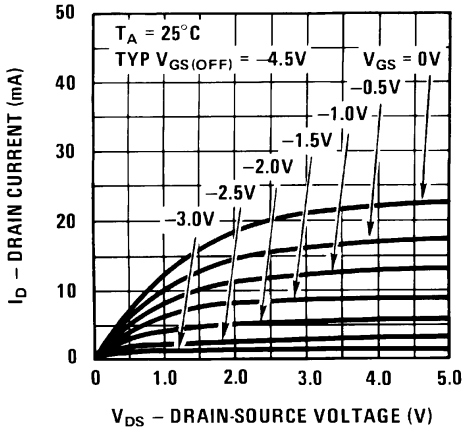

Typical Characteristics (continued)

Transfer Characteristics

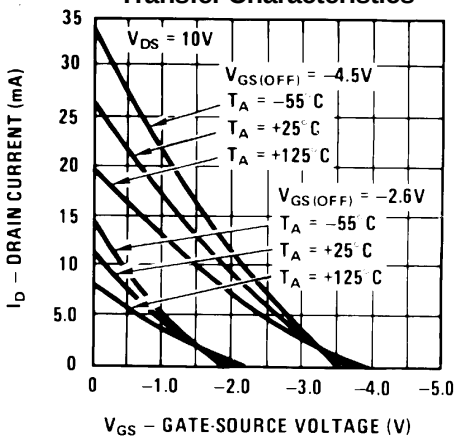

Transfer Characteristics

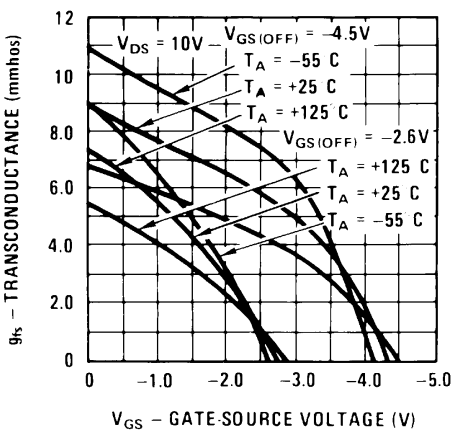

Leakage Current vs. Voltage

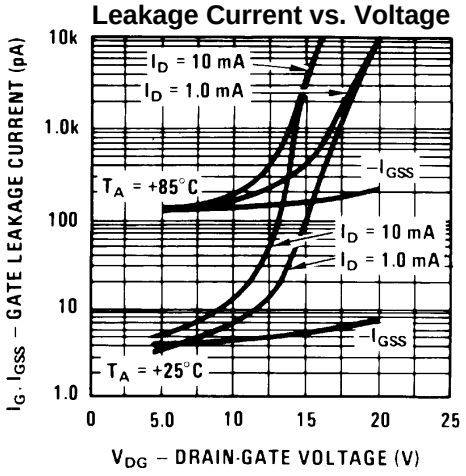

Noise Voltage vs. Frequency

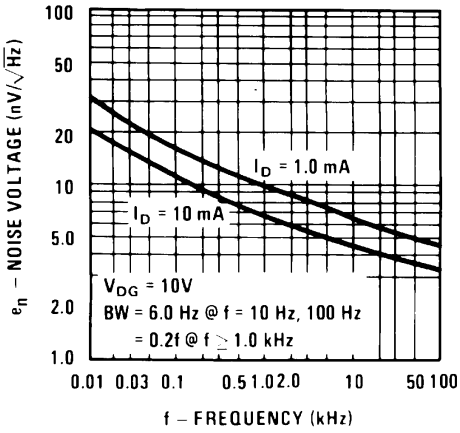

Transconductance vs. Drain Current

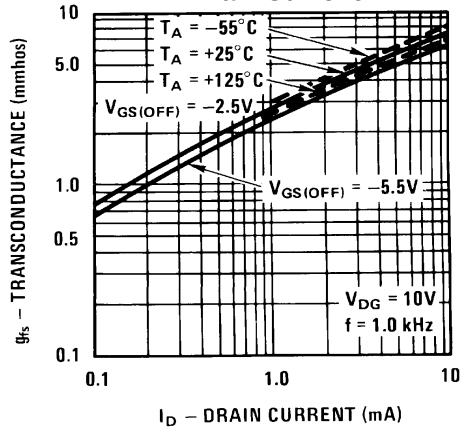

Output Conductance vs. Drain Current

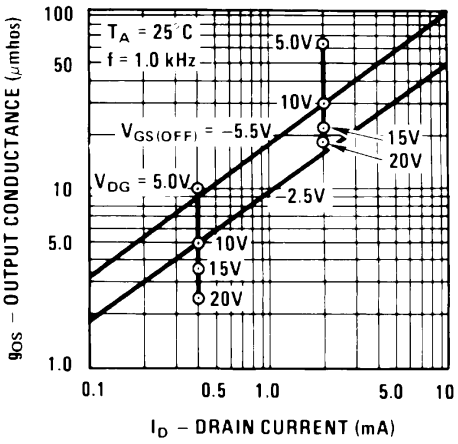

Typical Characteristics (continued)

Capacitance vs. Voltage

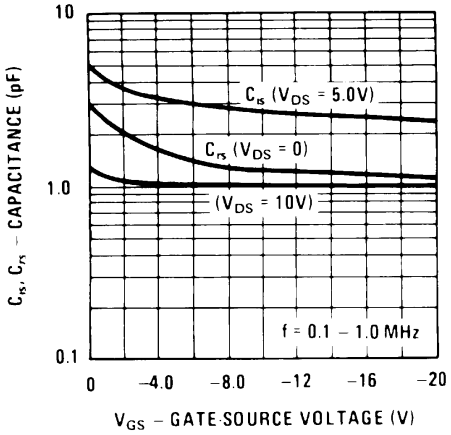

Common Source Characteristics

Input Admittance

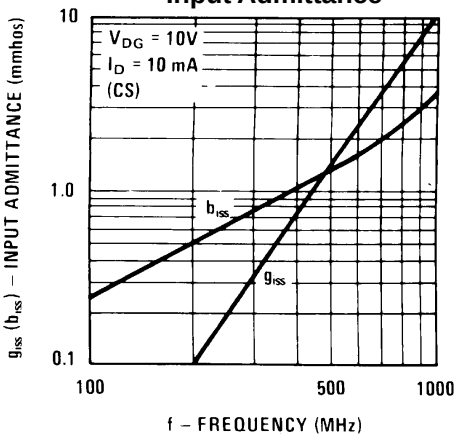

Forward Transadmittance

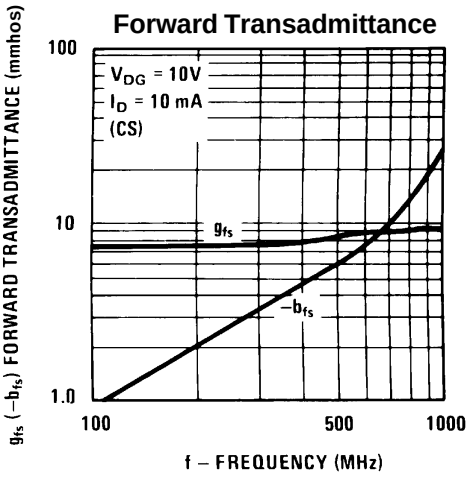

Output Admittance

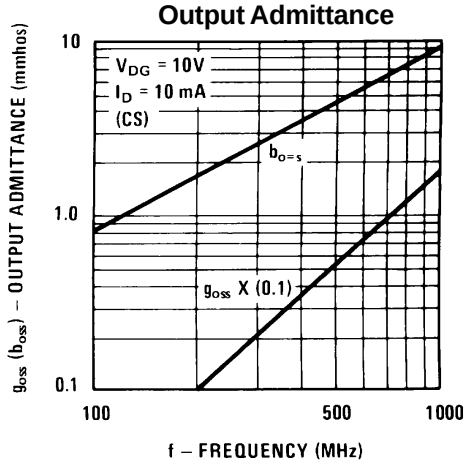

Reverse Transadmittance

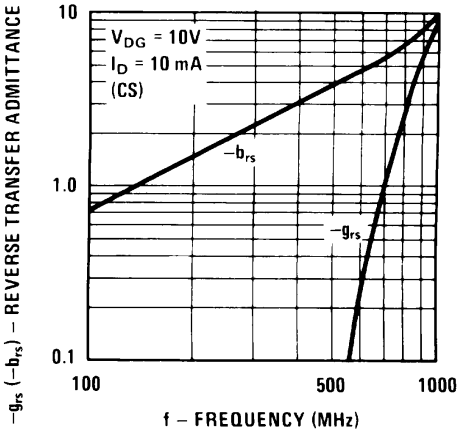

Common Gate Characteristics

Input Admittance

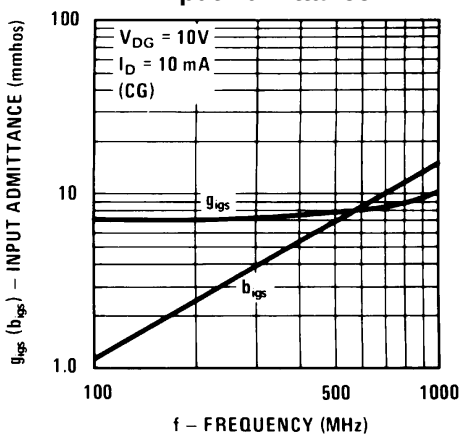

Forward Transadmittance

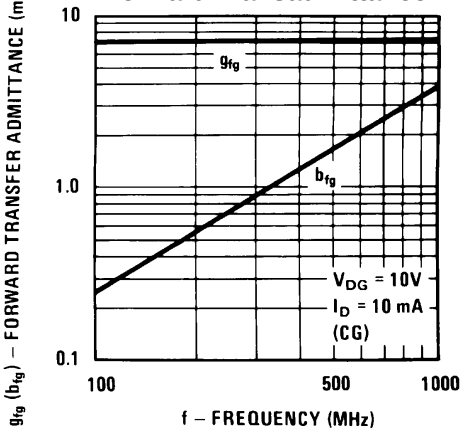

Output Admittance

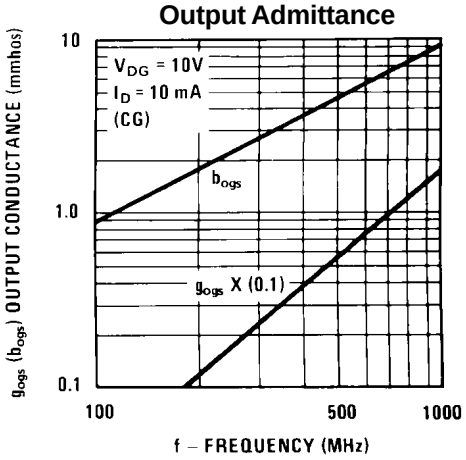

Reverse Transadmittance

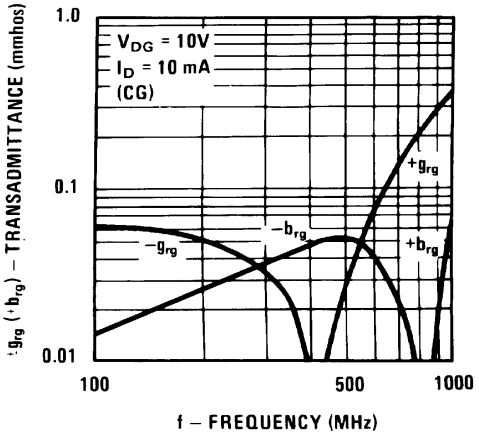

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST ®	OPTOPLANAR™	SuperSOT™-3
Bottomless™	FASTr™	PACMAN™	SuperSOT™-6
CoolFET™	FRFET™	POP™	SuperSOT™-8
CROSSVOLT™	GlobalOptoisolator™	PowerTrench ®	SyncFET™
DenseTrench™	GTO™	QFET™	TinyLogic™
DOME™	HiSeC™	QS™	UHC™
EcoSPARK™	ISOPLANAR™	QT Optoelectronics™	UltraFET®
E^2CMOS^{TM}	LittleFET™	Quiet Series™	VCX™
EnSigna™	MicroFET™	SILENT SWITCHER ®	
FACT™	MICROWIRE™	SMART START™	
FACT Quiet Series™	OPTOLOGIC™	Stealth™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.
As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.